

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon

Measured Data

QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.15	Ohms
2	Fs	58.91	Hz
3	Re	7.28	Ohms[dc]
4	Res	26.66	Ohms
5	Qms	4.20	
6	Qes	1.15	
7	Qts	0.90	
8	L1	0.48	mH
9	L2	0.58	mH
10	R2	2.64	Ohms
11	RMSE-load	0.28	Ohms
12	Vas(Sd)	17.71	liters
13	Mms	11.34	grams
14	Cms	643	$\mu\text{M}/\text{Newton}$
15	B1	5.16	Tesla-M
16	SPLref(Sd)	86.8	dB[Re]
17	Rub-index	0.00	

Method: Mass-loaded (20.00 grams)

Area (Sd): 140.00 sq cm


DCR mode: Measure (-0.06 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -38.9% (-20% to -50% is recommended).

ARN-165-61/8

MLSSA: Parameters

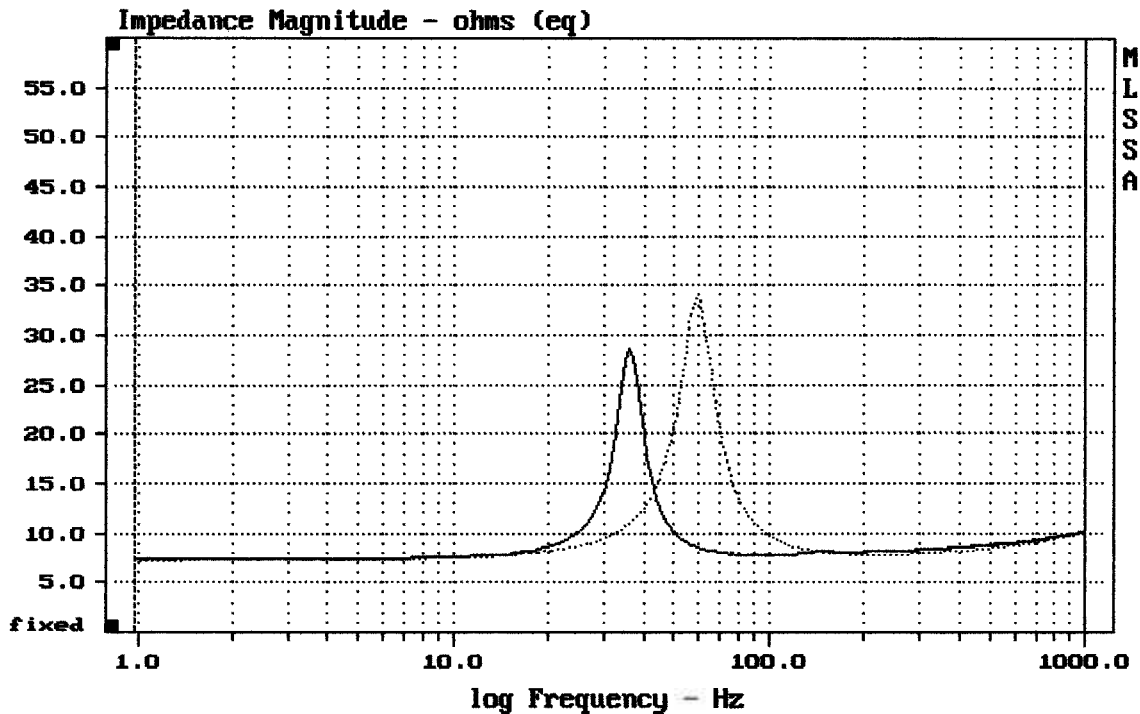


CURSOR: dy = -0.148311 x = 1000.9766 (1025)

DITO

11-21-83 2:55 PM

MLSSA: Frequency Domain

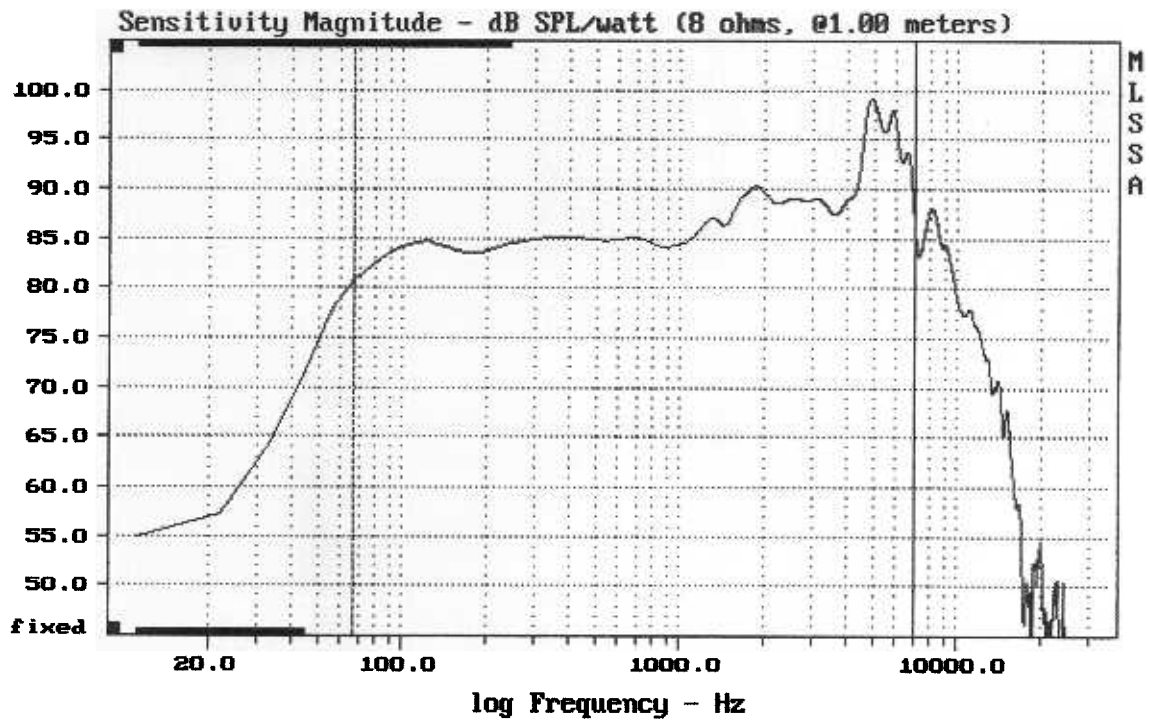


Level (67:7002 Hz) = 88.92 dB SPL/watt (8 ohms, @1.00 meters)

ARN-165-61/B

11-21-83 4:32 PM

MLSSA: Frequency Domain

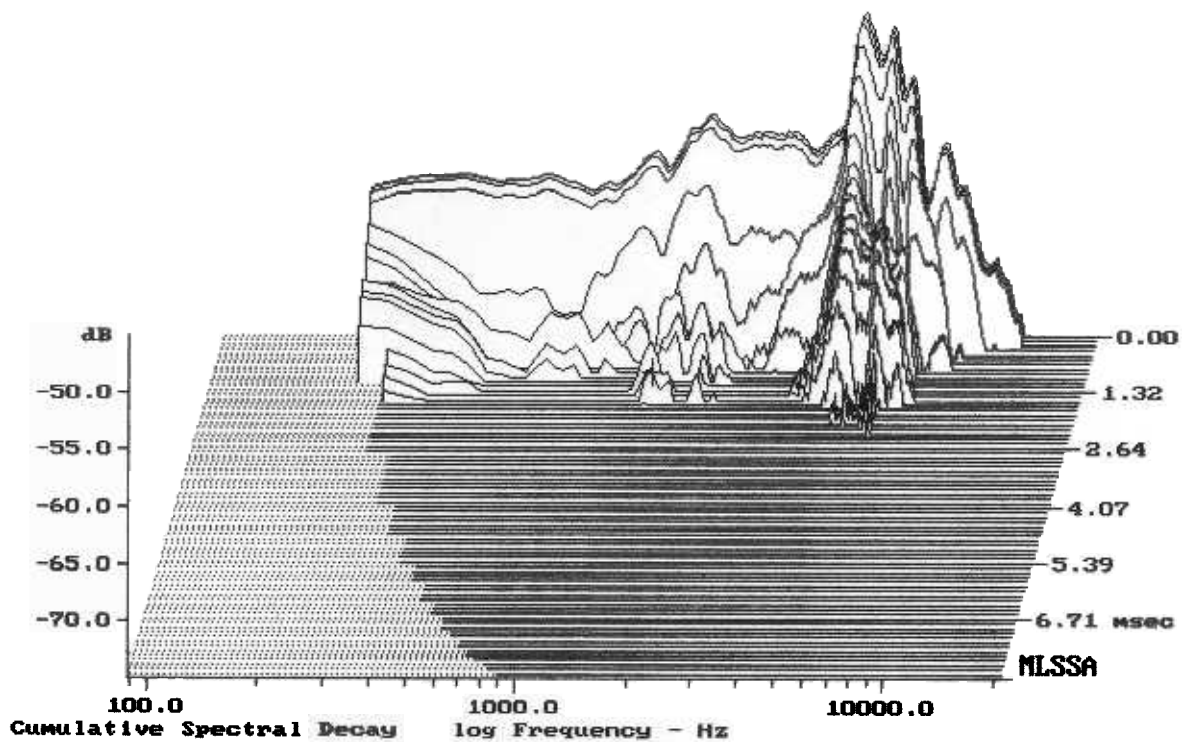

-75.00 dB, 1376 Hz (31), 0.800 msec (9)