


Level (100:2009 Hz) = 89.33 dB SPL/watt (4 ohms, @1.00 meters)

TESLA ARM 8604

8-17-83 9:55 PM

MLSSA Frequency Domain

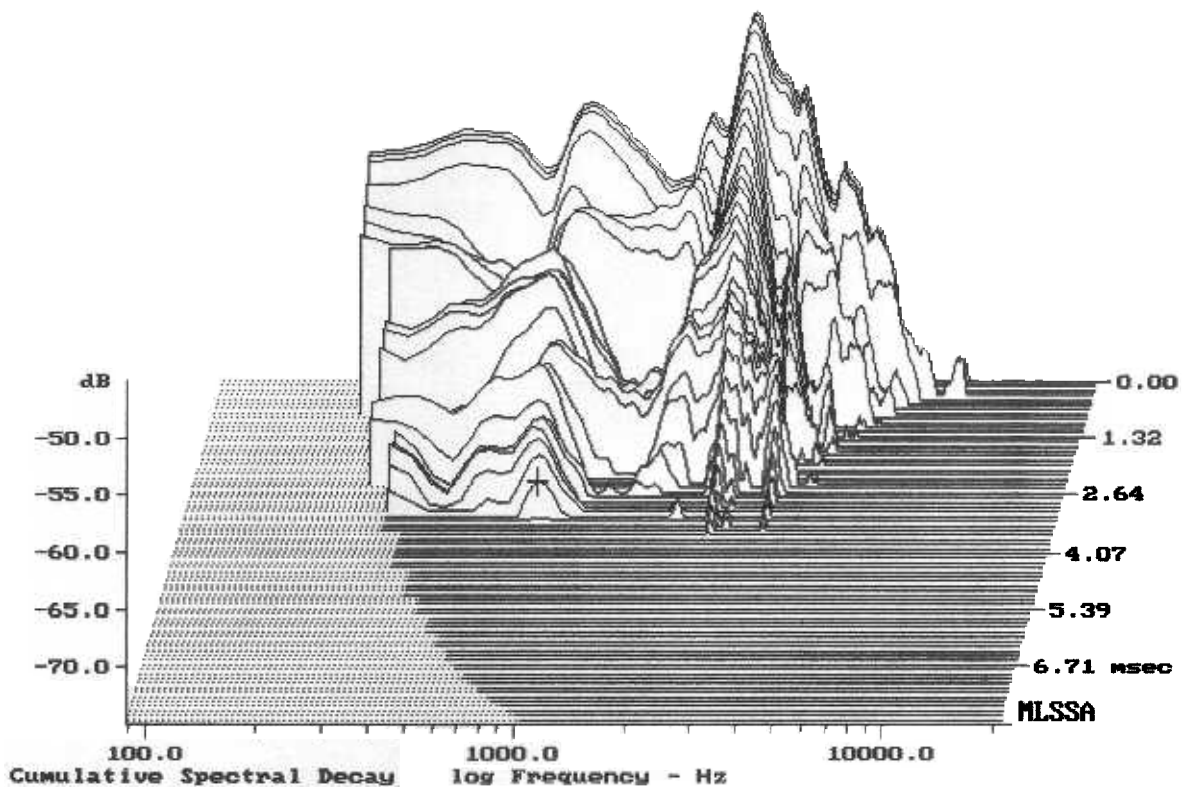

-71.94 dB, 799 Hz (18), 3.190 msec (30)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.24	Ohms
2	Fs	30.28	Hz
3	Re	3.60	Ohms[dc]
4	Res	21.35	Ohms
5	Qms	2.81	
6	Qes	0.47	
7	Qts	0.41	
8	L1	0.63	mH
9	L2	0.94	mH
10	R2	4.31	Ohms
11	RMSE-load	0.38	Ohms
12	Vas(Sd)	180.75	liters
13	Mms	51.74	grams
14	Cms	534	$\mu\text{M}/\text{Newton}$
15	B1	8.65	Tesla-M
16	SPLref(Sd)	92.1	dB[Re]
17	Rub-index	0.02	

Method: Mass-loaded (60.00 grams)

Area (Sd): 490.87 sq cm


DCR mode: Measure (-0.11 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -29.4% (-20% to -50% is recommended).

TESLA ARN 8604

MLSSA: Parameters

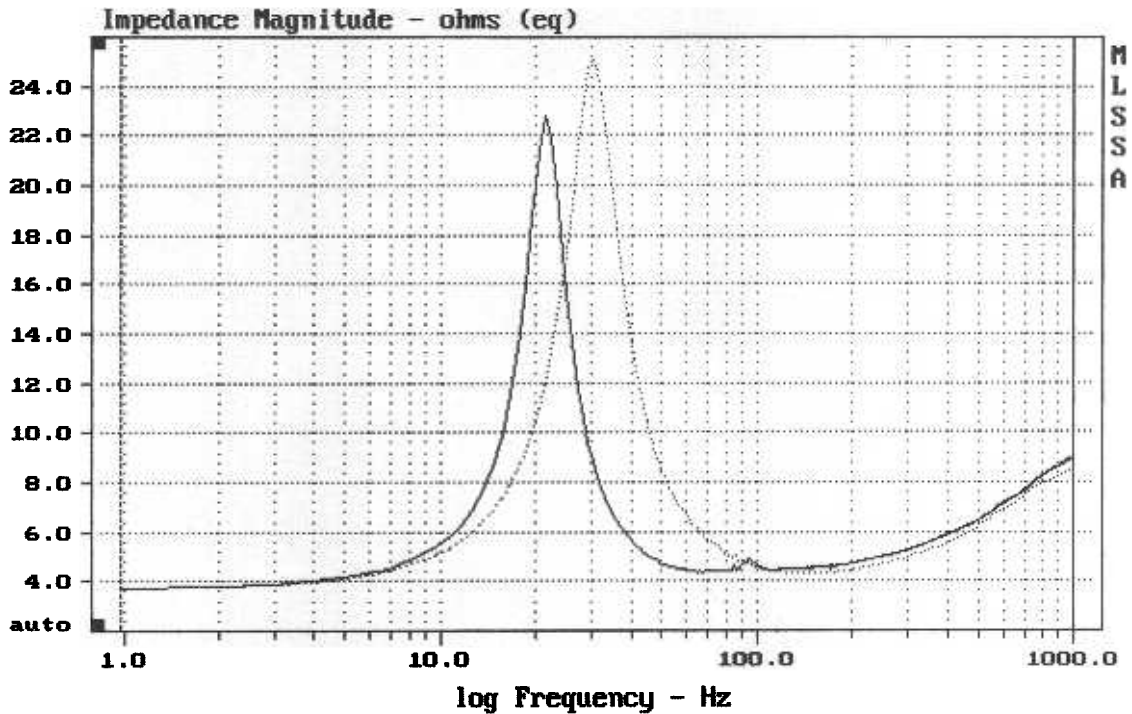

mean: 6.783, rms: 7.899, std: 2.339, max: 25.86, min: 3.689

DTTO

8-17-83 9:46 PM

MLSSA: Frequency Domain