

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
 Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.19	Ohms
2	Fs	51.42	Hz
3	Re	3.77	Ohms[dc]
4	Res	32.23	Ohms
5	Qms	6.39	
6	Qes	0.75	
7	Qts	0.67	
8	L1	0.42	mH
9	L2	0.49	mH
10	R2	1.54	Ohms
11	RMSE-load	0.17	Ohms
12	Vas(Sd)	210.48	liters
13	Mms	29.86	grams
14	Cms	321	$\mu\text{M}/\text{Newton}$
15	Bl	6.98	Tesla-M
16	SPLref(Sd)	97.7	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 683.49 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -33.1% (-20% to -50% is recommended).

ARO 835 OPR. HUSAK ORIGINAL MEMBR.


MLSSA: Parameters

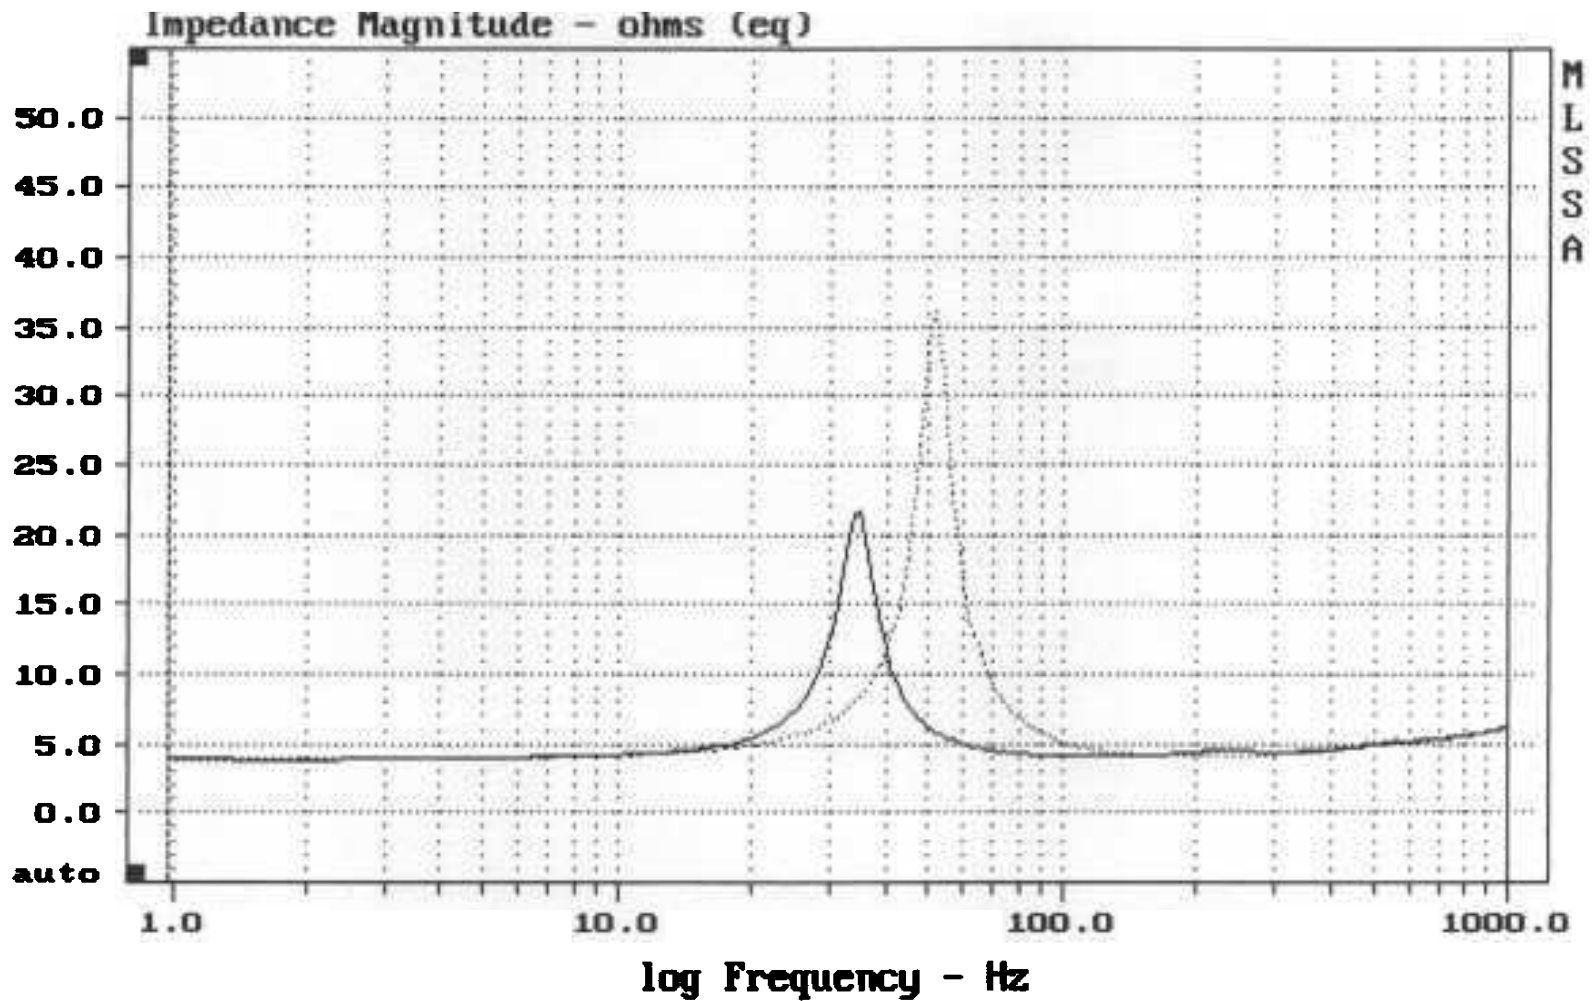

mean: 5.585, rms: 6.267, std: 2.995, max: 36.13, min: 3.862

9-14-85 4:04 PM

MLSSA: Frequency Domain

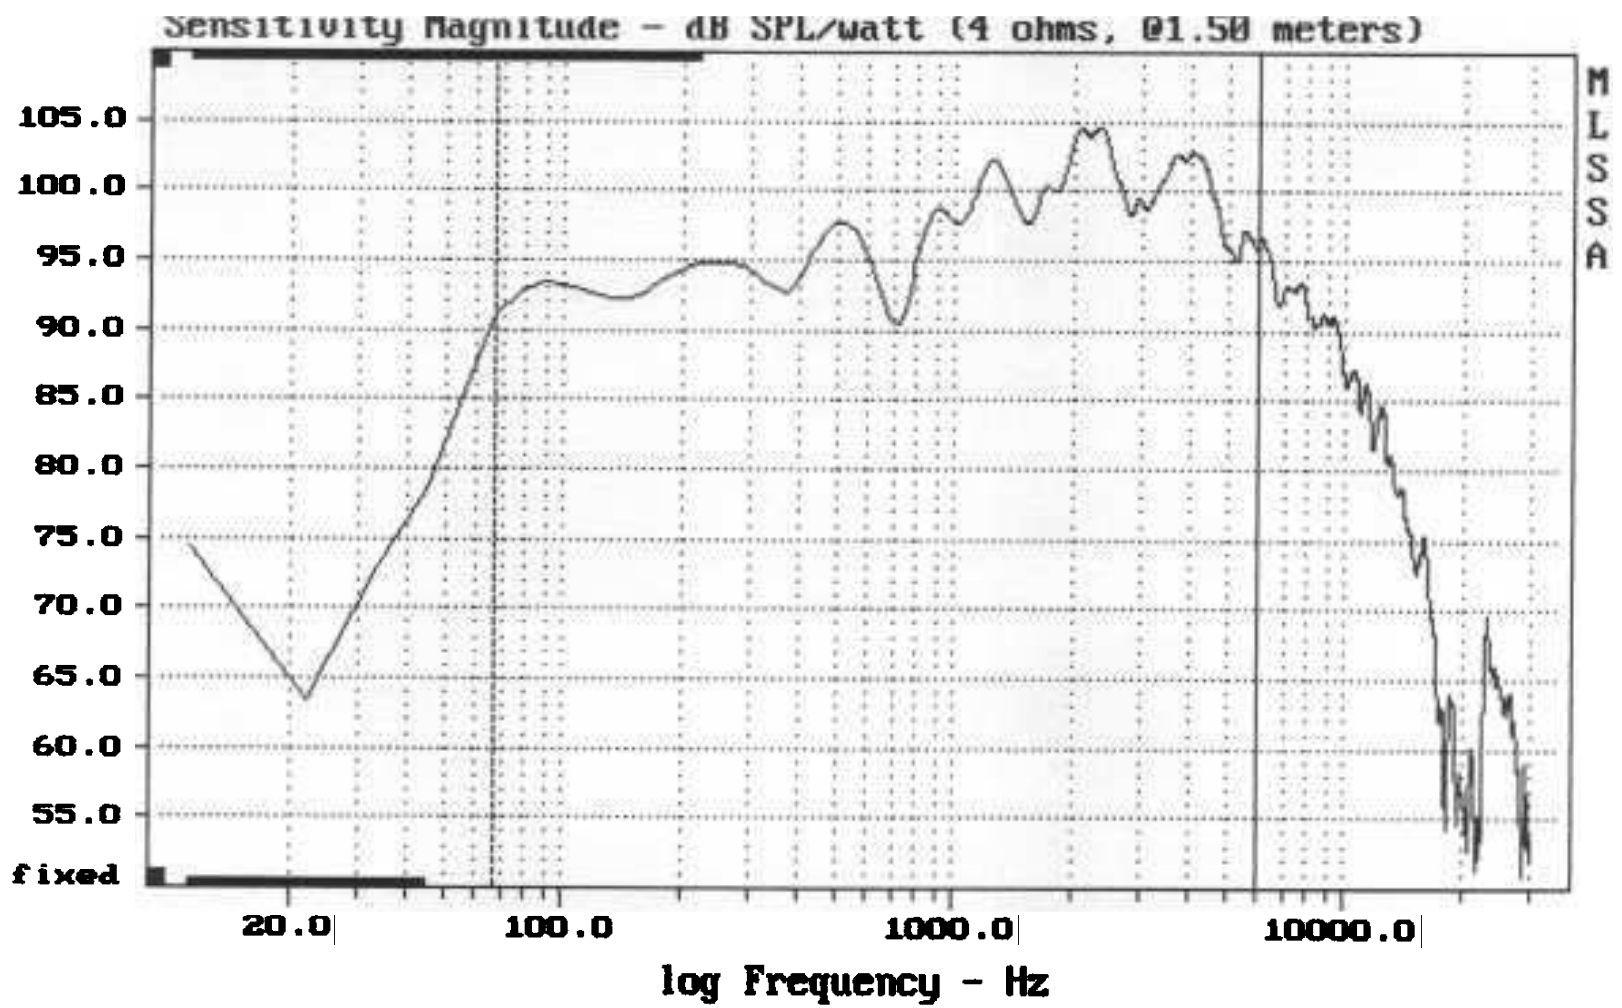


Level (67:6884 Hz) = 98.17 dB SPL/watt (4 ohms, @1.50 meters)

ARO 835 OPR. HUSAK ORIG. MEMBR.

9-14-85 4:23 PM

MLSSA: Frequency Domain

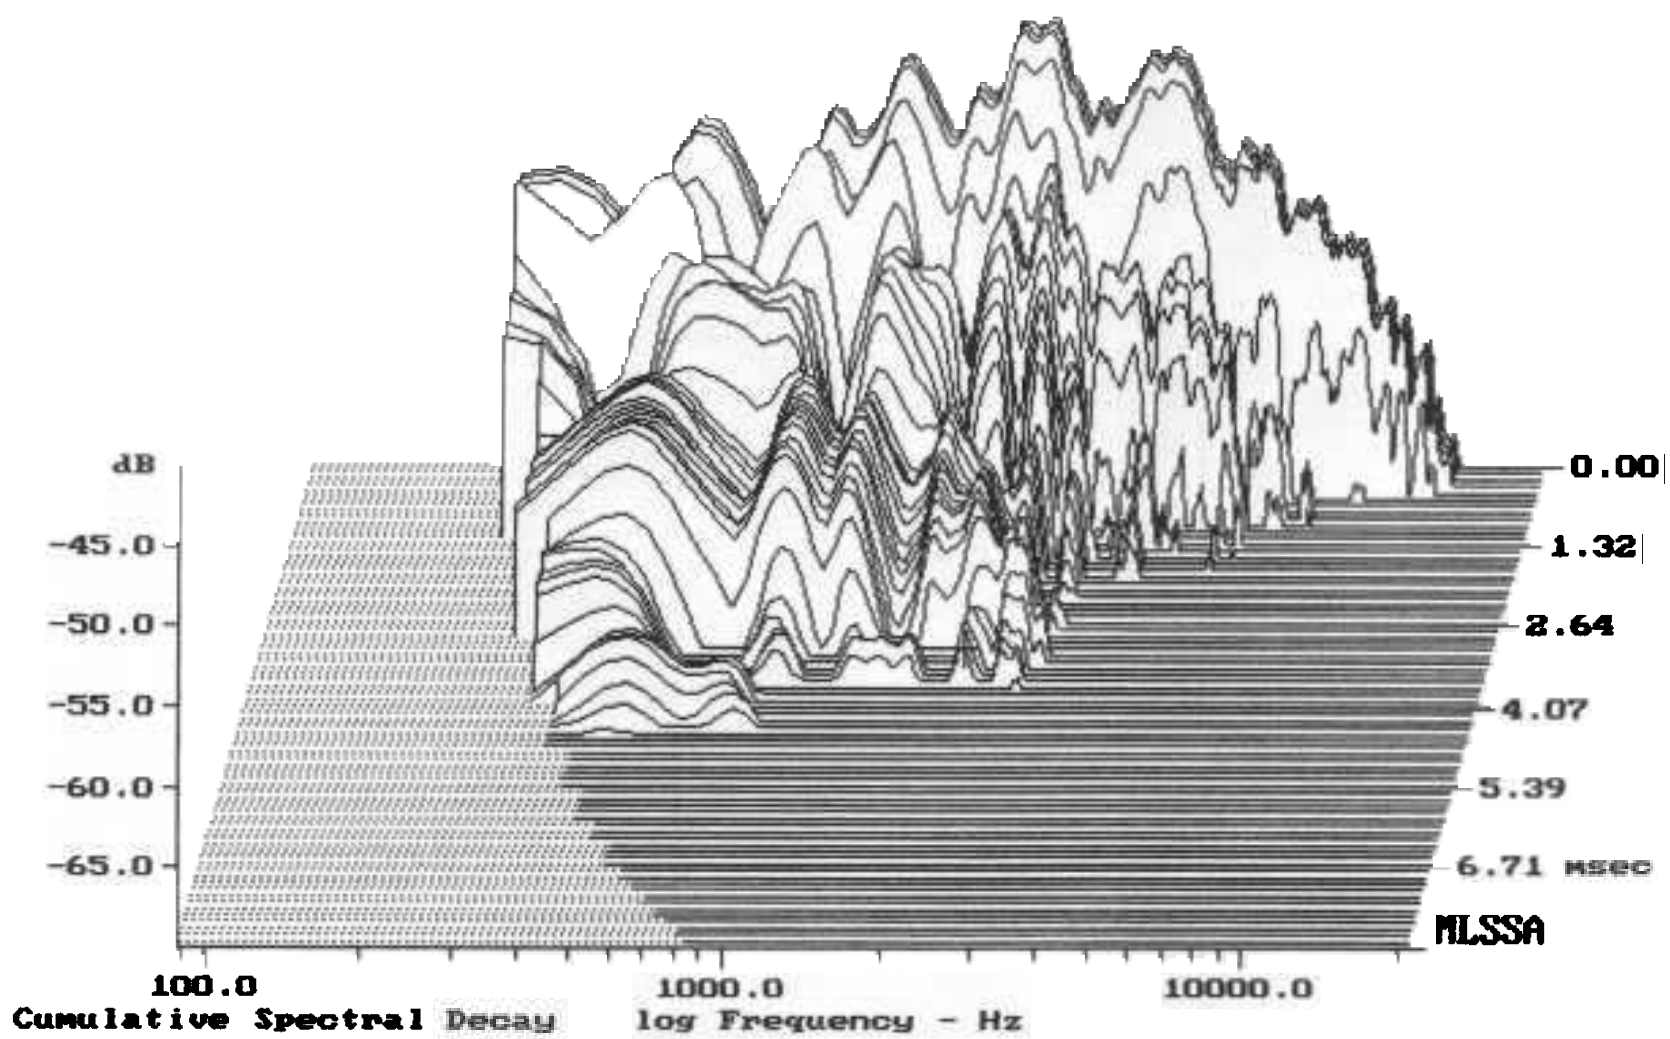

-67.88 dB, 2886 Hz (47), 3.630 msec (34)